

# BathyCopter<sup>®</sup>

The BathyCopter is a UAV-based LiDAR surveying system for bathymetric applications, ideally suited for generating profiles of shorelines and inland waterbodies.

The robust and reliable platform design of RIEGL's remotely piloted RiCOPTER now integrates the **RIEGL BDF-1**, a compact and lightweight bathymetric depth finder comprising a tilt compensator, an IMU/GNSS unit with antenna, a control unit, and up to two external digital cameras. The **RIEGL BDF-1** can optionally be supplemented with a miniVUX-1 UAV LiDAR sensor.



## BathyCopter<sup>®</sup> UAV-Based Surveying System for Hydrographic Applications

### Typical Applications

- Generation of profiles of shorelines and inland water bodies (rivers, lakes, channels)
- Repeated survey of water reservoirs
- Canal surveying
- Landscaping
- Surveys for planning and hydraulic engineering work




Scan this QR code  
to watch the  
BathyCopter video.

[www.riegl.com](http://www.riegl.com)  
[www.ricopter.com](http://www.ricopter.com)



## BathyCopter Measuring Principle

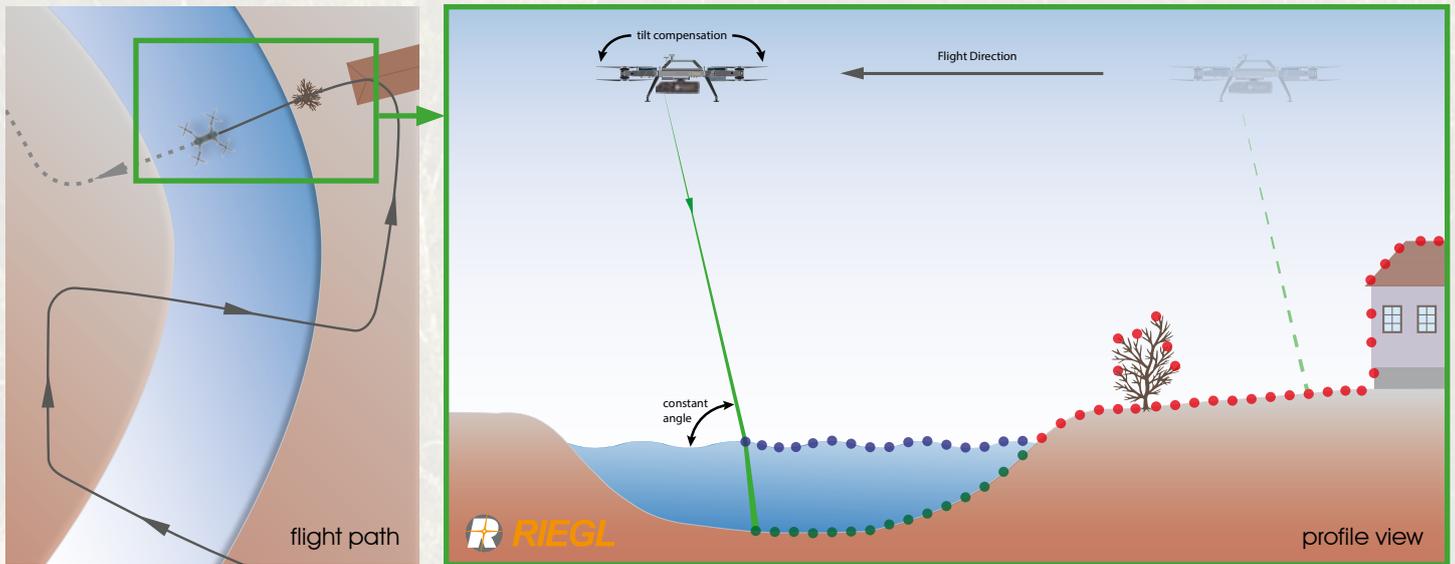

The drawings above illustrate the measurement principle of the BDF-1 when operated from a UAV: The UAV performs a meander-like flight path over an inland water body (river, channel, or lake) while the BDF-1 is measuring downward. In case the optional tilt compensator is used, the measuring angle is user-defined and stabilized. Profiles of the water surface (blue dots), ground (green dots) as well as the surrounding landscape (red dots) are generated this way. The multi-target capability of the rangefinder is not only employed for separating the water surface from the ground but also for vegetation penetration.

## RIEGL VUX-SYS Scan Data and RIEGL BDF-1 Profiles




Riverine zone surveying is a typical application of the BathyCopter:

The image above shows a colorized 3D point cloud acquired with a VUX-1UAV combined with profiles acquired by the BDF-1. Both devices were mounted on the RiCOPTER. The combined dataset provides comprehensive information about the topography of the river and its surroundings. The locations of the detailed river profiles are selected according to hydrographic viewpoints. They can be used to assess water transportation, roughness, and clarity.

### BathyCopter General Setup



RICOPTER

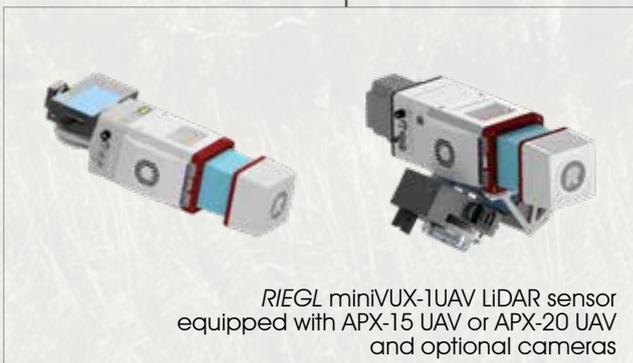

RIEGL miniVUX-1UAV LiDAR sensor equipped with APX-15 UAV or APX-20 UAV and optional cameras



BDF-1 bathymetric depth finder with Sony alpha 6000 camera



floating support

## BathyCopter Key Features

- UAV-based surveying system for hydrographic applications
- ideally suited for generating profiles of shorelines and inland waterbodies
- fully integrated solution, comprising RIEGL Bathymetric Depth Finder BDF-1 providing up to 1.5 Secchi depth measuring range
- floating support for safe water landing and take-off from water bodies
- excellent performance even at adverse conditions based on predetection averaging
- highly accurate, reliable and informative bathymetric data resulting from RIEGL's proprietary hydrographic waveform processing
- **modular setup<sup>1)</sup>**:  
The RiCOPTER can be equipped with BDF-1, floating support, camera(s), or miniVUX-1UAV LiDAR sensor.

1) Note: Operation is subject to legal conditions, especially for configurations with MTOM >25 kg

## BathyCopter Specifications

<b>Laser Class</b> according to IEC 60825-1:2014	Class 2M 
<b>Operating Flight Altitude</b>	10 - 40 m AWSL (Above Water Surface Level)
<b>MTOM</b> (Maximum Take-Off Mass)	25 kg <sup>2)</sup>
<b>Flight Endurance</b>	up to 30 min
<b>Measurement Direction</b>	downward-looking, 15° off nadir
<b>Active Pitch Compensation</b>	24° range
<b>Achievable Secchi Depth vs. Measurement Rate</b> <sup>3)</sup>	1.0 @ 4,000 meas./sec (single pulse) 1.2 @ 400 meas./sec (10 pulses averaged) 1.5 @ 40 meas./sec (100 pulses averaged)
<b>Integrated Camera</b>	Sony Alpha 6000
<b>IMU/GNSS unit</b>	Applanix APX-15 UAV
<b>Operation Temperature</b>	+10°C up to +40°C
<b>Main Dimensions</b> arms folded (for transportation & storage) arms unfolded (ready to fly)	624 mm x 986 mm x 470 mm 1,920 mm x 1,820 mm x 470 mm
<b>Transportation Case</b> (dimensions)	1,220 mm x 810 mm x 540 mm

2) applies for basic setup RiCOPTER with BDF-1

3) @ flight altitude 15 m above water surface

## BathyCopter Highlights



BathyCopter in action



BathyCopter ready for take-off



Transportation Case: foldable arms facilitate easy transportation and storage



BathyCopter Ground Control Unit



Watch our videos!  
[youtube.com/rieglms](http://youtube.com/rieglms)

The RiCOPTER/BathyCopter is a high performance unmanned multi-rotor aircraft, designed & manufactured by RIEGL Laser Measurement Systems GmbH. It is distributed, supported and serviced by RiCOPTER UAV GmbH, also a RIEGL company.

Copyright RiCOPTER UAV GmbH © 2018 – All rights reserved.  
Use of this data sheet other than for personal purposes requires RiCOPTER UAV GmbH's written consent.  
This data sheet is compiled with care. However, errors cannot be fully excluded and alternations might be necessary.

[www.ricopter.com](http://www.ricopter.com)

**RiCOPTER**®  
... A RIEGL® COMPANY