

# Dual Channel Waveform Processing Airborne LiDAR Scanning System for High Point Density Mapping and Ultra-Wide Area Mapping

**NEW**

# RIEGL VQ-1560 II

- **high laser pulse repetition rate up to 4 MHz**
- **up to 2.66 million measurements per second on the ground**
- **offers highly efficient data acquisition at a wide range of point densities**
- **two waveform processing LiDAR channels offering excellent multiple target detection capability**
- **enables Multiple-Time-Around (MTA) processing of up to 35 pulses simultaneously in the air**
- **excellent suppression of atmospheric clutter**
- **offers online waveform processing as well as smart and full waveform recording**
- **integrated inertial measurement unit and GNSS receiver**
- **integrated, easily accessible medium format camera**
- **prepared for integration of a secondary camera**
- **high-speed fiber data interface to RIEGL data recorder**
- **housing shape and mounting flange optimized for interfacing with typical hatches and stabilized platforms**
- **detachable handgrips for facilitated handling**

The Dual LiDAR Waveform Processing Airborne Scanning System VQ-1560 II provides further increased performance and highest productivity based on a laser pulse repetition rate of up to 4 MHz, resulting in more than 2.66 million measurements per second on the ground.

Typical operating flight altitudes vary from less than 1,500 ft up to 12,100 ft (@ target reflectance of >20%). Laser pulse repetition rates can be tuned in steps of less than 12 kHz.

In combination with different laser power modes subtle optimization of acquisition parameters is possible in order to meet specific project requirements.

These features make the instrument the most flexible choice for acquisition of scan data with an exceptionally wide range of achievable point densities and utmost data collection efficiency at the same time. The unique forward/backward scan angle of the VQ-1560 II with its large field of view of 58 degrees enables capturing data from multiple angles more effectively and more accurately at high point densities.

The system is equipped with a seamlessly integrated high performance IMU/GNSS unit and e.g. an optional 150 megapixel RGB camera integrated in the primary camera bay.

Optionally, a second camera, e.g. a thermal camera or a 150 megapixels near-infrared camera, can be integrated on request. The design of the compact housing features a mounting flange for interfacing with typical hatches or gyro-stabilized leveling mounts.

## Applications:

- Ultra Wide Area / High Altitude Mapping
- Ultra-High Point Density Mapping
- Mapping of Complex Urban Environments
- Glacier & Snowfield Mapping
- City Modeling
- Mapping of Lakesides & River Banks
- Agriculture & Forestry
- Corridor Mapping




visit our website  
[www.riegl.com](http://www.riegl.com)



**RIEGL®**  
LASER MEASUREMENT SYSTEMS


## RIEGL VQ-1560 II Scan Pattern


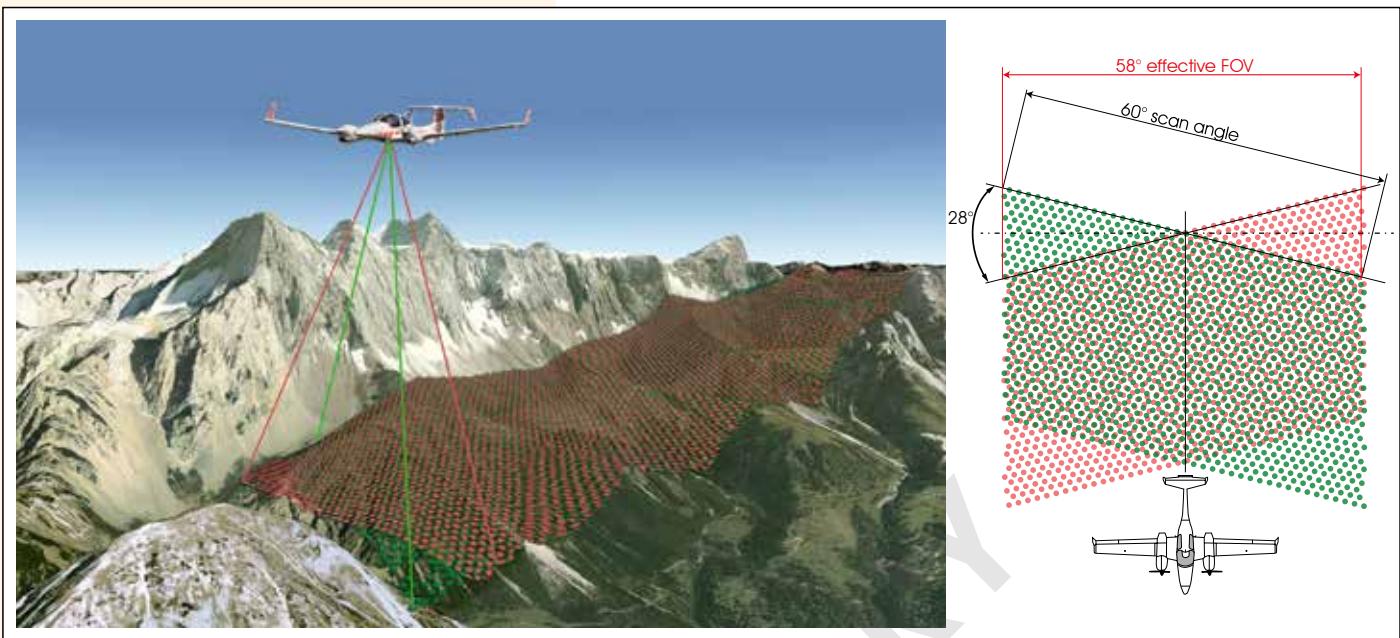


Each channel delivers straight parallel scan lines. The scan lines of the two channels are tilted against each other by 28 degrees providing an optimum distribution of the measurements on the ground invariant to changes in terrain height.

Tilt Angle of Scan Lines	$\pm 14^\circ$
Forward/Backward Scan Angle in Non-Nadir Direction	$\pm 8^\circ$ at the edge

## RIEGL VQ-1560 II Elements of Function and Operation

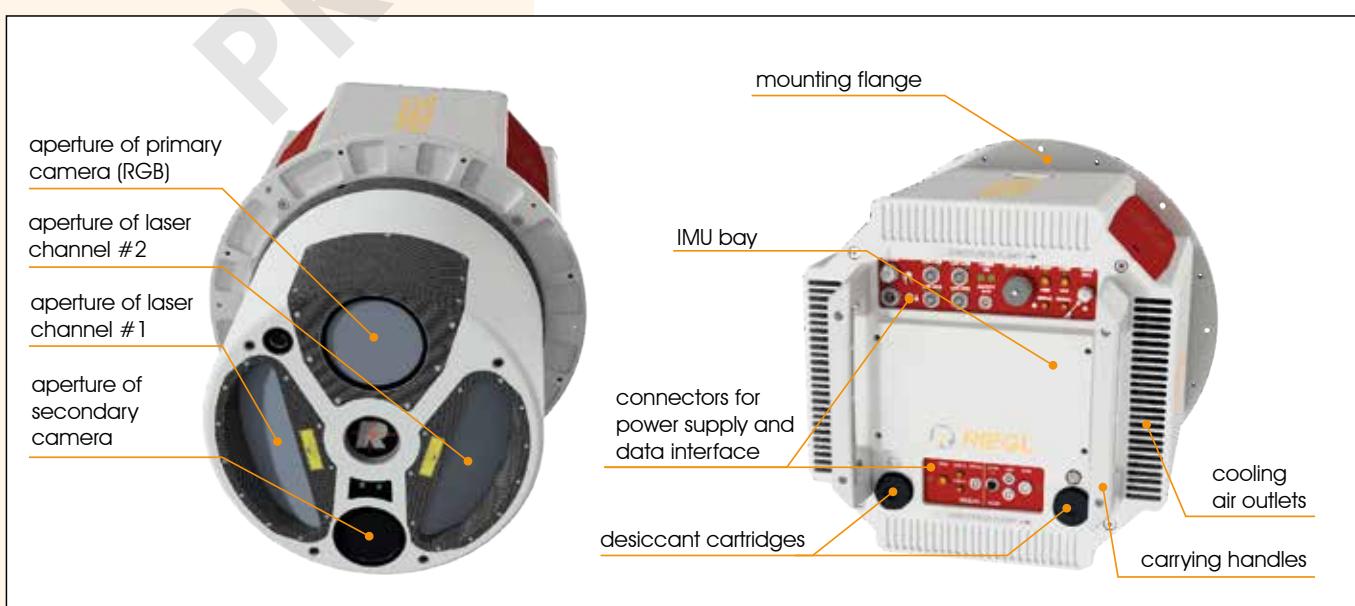

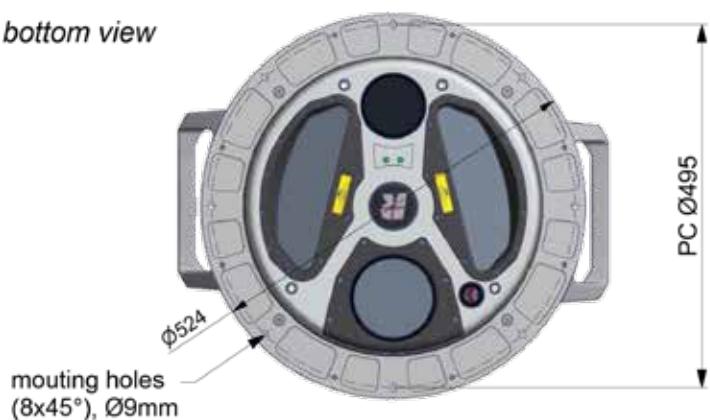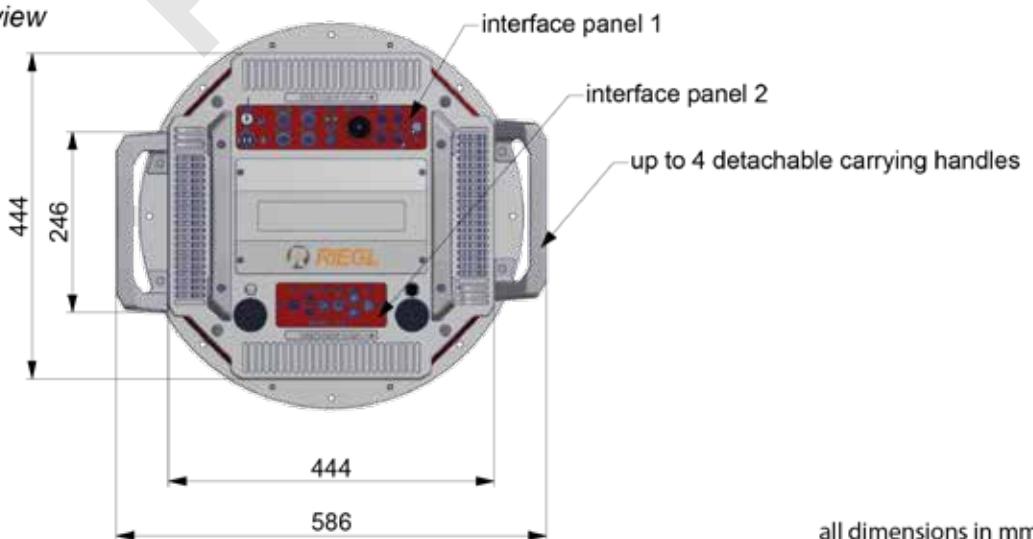*bottom view**side view**top view*

## RIEGL VQ-1560 II System Components



A minimum number of system components and external cabling is required for an easy and quick installation in aircrafts.

## RIEGL VQ-1560 II Installation Examples




RIEGL VQ-1560 II installed  
in the nose pod of fixed-wing  
aircraft DA42 MPP




RIEGL VQ-1560 II installed on GSM-4000  
gyro-stabilized platform to be used in  
a helicopter or fixed-wing aircraft


# Measurement Range & Point Density RIEGL VQ-1560 II

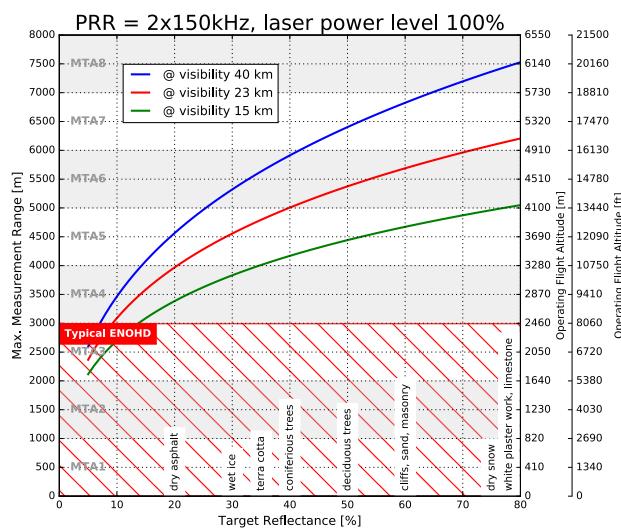


**Example:** VQ-1560 II at 2 x 150,000 pulses/sec, laser power level 100% Altitude 14,900 ft AGL, Speed 150 kn

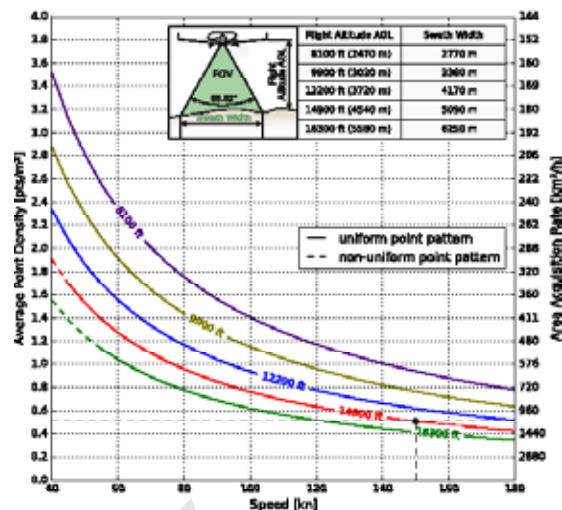


**Results:** Point Density ~ 0.51 pts/m<sup>2</sup>  
Area Acquisition Rate ~ 1130 km<sup>2</sup>/h

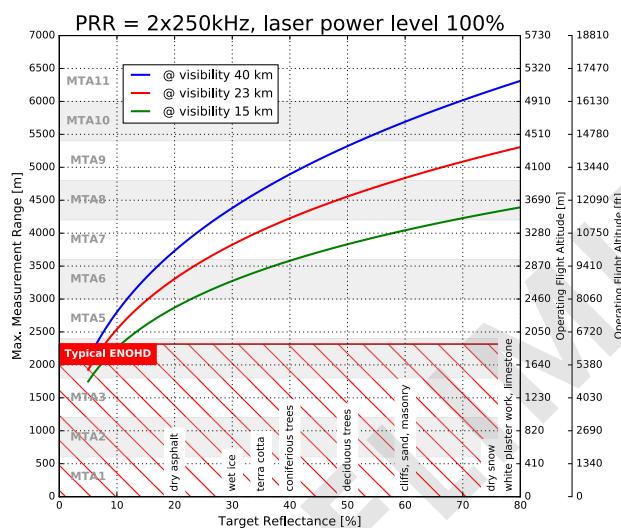


**Example:** VQ-1560 II at 2 x 250,000 pulses/sec, laser power level 100% Altitude 12,100 ft AGL, Speed 140 kn

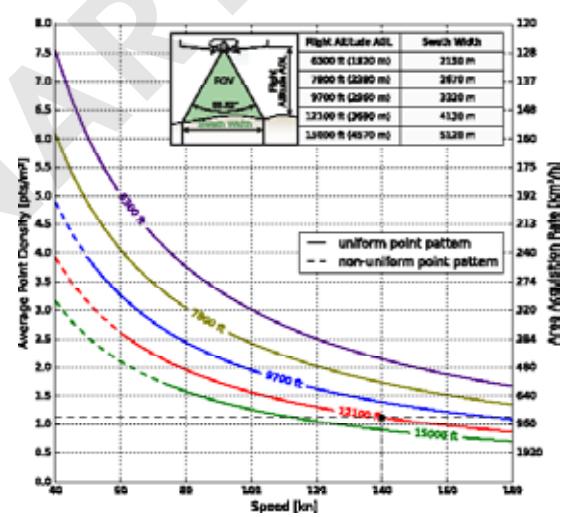

**Results:** Point Density ~ 1.12 pts/m<sup>2</sup>  
Area Acquisition Rate ~ 857 km<sup>2</sup>/h

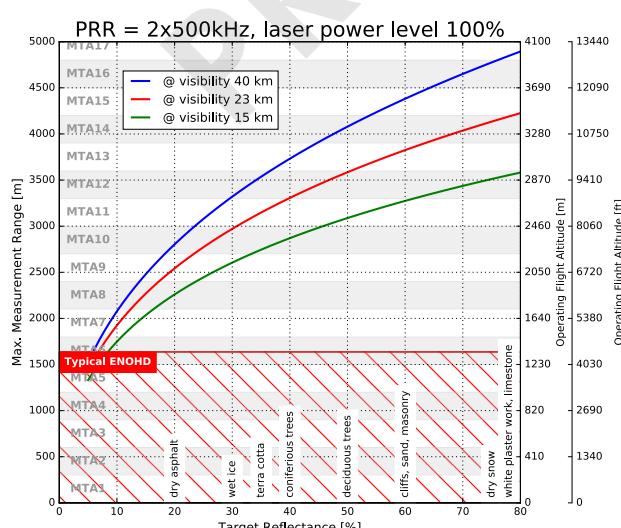

**Example:** VQ-1560 II at 2 x 500,000 pulses/sec, laser power level 100% Altitude 7,100 ft AGL, Speed 130 kn

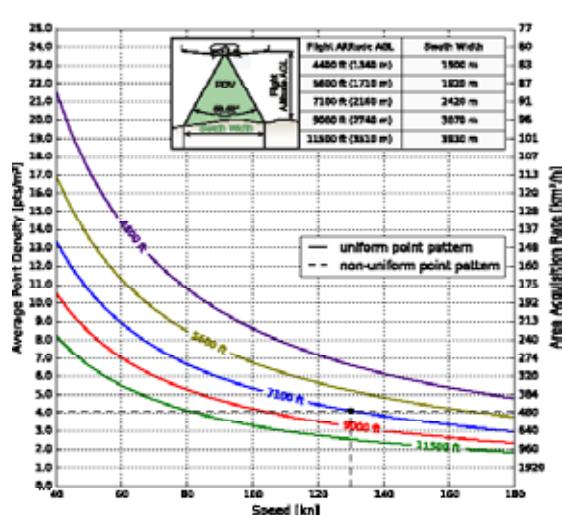

**Results:** Point Density ~ 4.12 pts/m<sup>2</sup>  
Area Acquisition Rate ~ 467 km<sup>2</sup>/h

## The following conditions are assumed for the Operating Flight Altitude AGL

- ambiguity resolved by multiple-time-around (MTA) processing
- target size  $\geq$  laser footprint
- effective FOV  $\leq 5^\circ$
- average ambient brightness
- roll angle  $\pm 5^\circ$


## Typical ENOHD

- Calculated under assumption of an angular step width of  $0.012^\circ$  and an aircraft speed higher than 10kn.


## Assumptions for calculation of the Area Acquisition Rate

- 20% overlap of neighbouring flight strips. This overlap covers a roll angle of  $\pm 5^\circ$  or a reduction of flight altitude AGL of 20%.


# Measurement Range & Point Density RIEGL VQ-1560 II

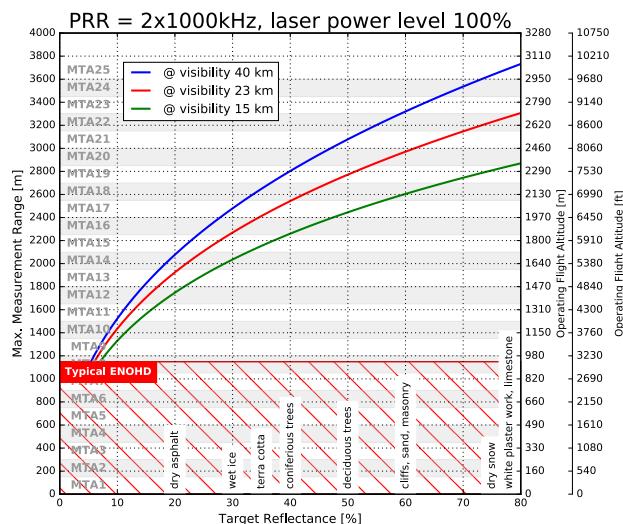


**Example:** VQ-1560 II at 2 x 1,000,000 pulses/sec, laser power level 100% Altitude 4,000 ft AGL, Speed 170 kn

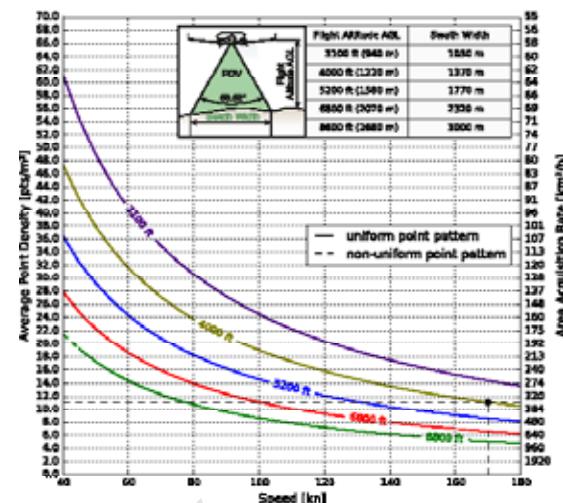


**Results:** Point Density ~ 11.1 pts/m<sup>2</sup>  
Area Acquisition Rate ~ 344 km<sup>2</sup>/h

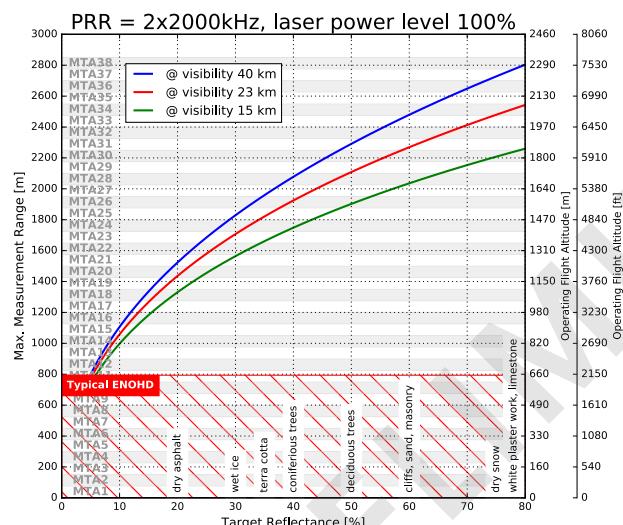


**Example:** VQ-1560 II at 2 x 2,000,000 pulses/sec, laser power level 100% Altitude 2,900 ft AGL, Speed 115 kn

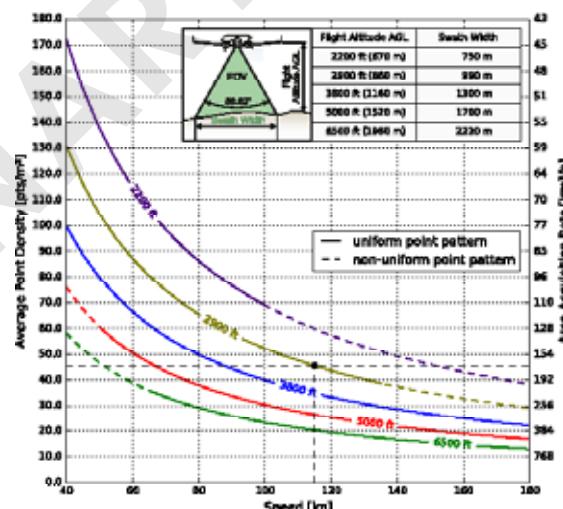

**Results:** Point Density ~ 45 pts/m<sup>2</sup>  
Area Acquisition Rate ~ 169 km<sup>2</sup>/h

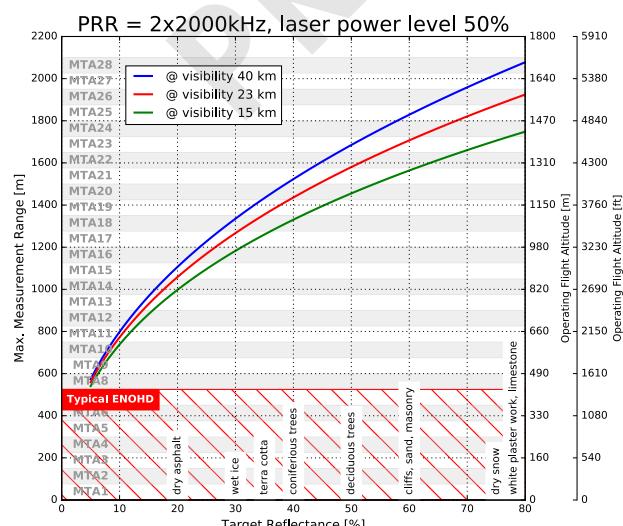

**Example:** VQ-1560 II at 2 x 2,000,000 pulses/sec, laser power level 50% Altitude 3,600 ft AGL, Speed 170 kn

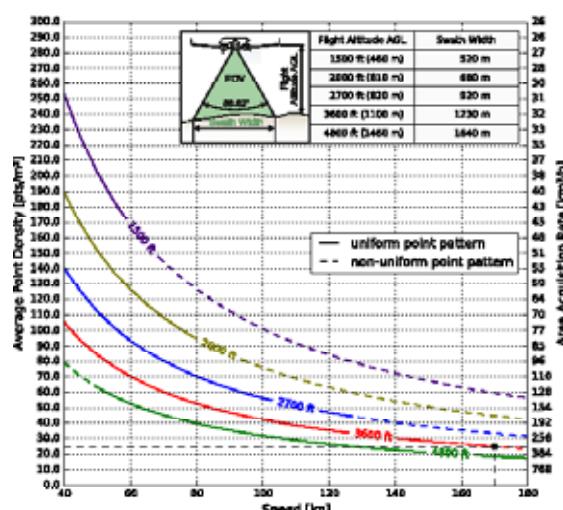

**Results:** Point Density ~ 24.8 pts/m<sup>2</sup>  
Area Acquisition Rate ~ 310 km<sup>2</sup>/h

**The following conditions are assumed for the Operating Flight Altitude AGL**

- ambiguity resolved by multiple-time-around (MTA) processing
- target size ≥ laser footprint
- effective FOV 58°
- average ambient brightness
- roll angle ±5°


**Typical ENOD**

- Calculated under assumption of an angular step width of 0.012° and an aircraft speed higher than 10kn.


**Assumptions for calculation of the Area Acquisition Rate**

- 20% overlap of neighboring flight strips. This overlap covers a roll angle of ±5° or a reduction of flight altitude AGL of 20%.


# Measurement Range & Point Density RIEGL VQ-1560 II

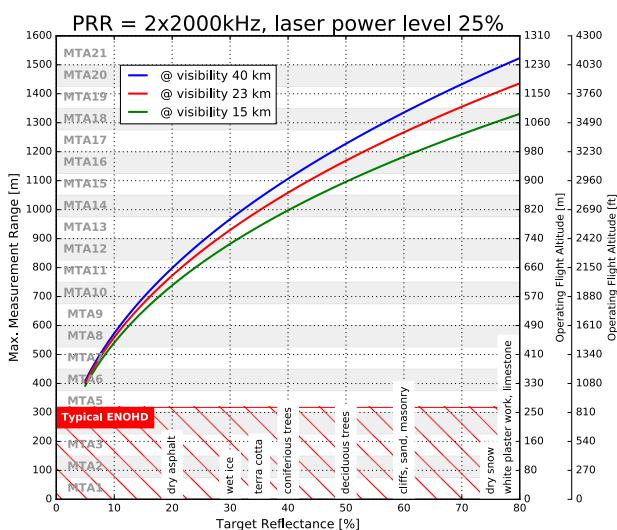


**Example:** VQ-1560 II at 2 x 2,000,000 pulses/sec, laser power level 25%  
Altitude 3,400 ft AGL, Speed 120 kn

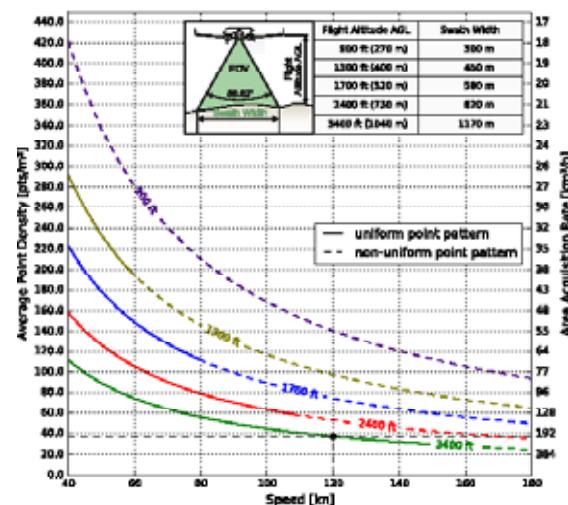


**Results:** Point Density ~ 37 pts/m<sup>2</sup>  
Area Acquisition Rate ~ 207 km<sup>2</sup>/h

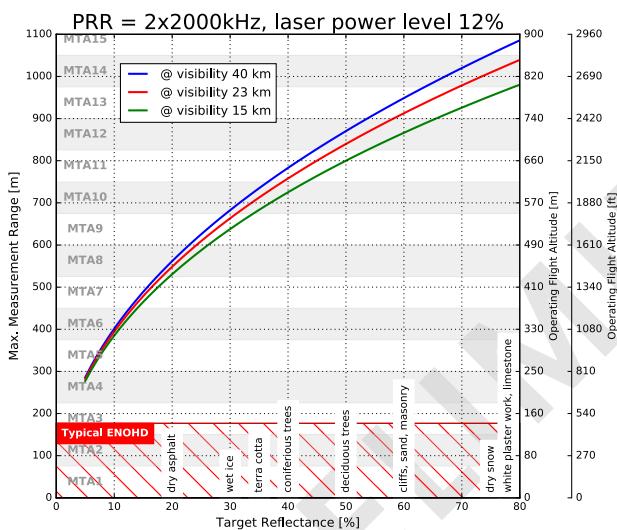


**Example:** VQ-1560 II at 2 x 2,000,000 pulses/sec, laser power level 12%  
Altitude 2,500 ft AGL, Speed 100 kn

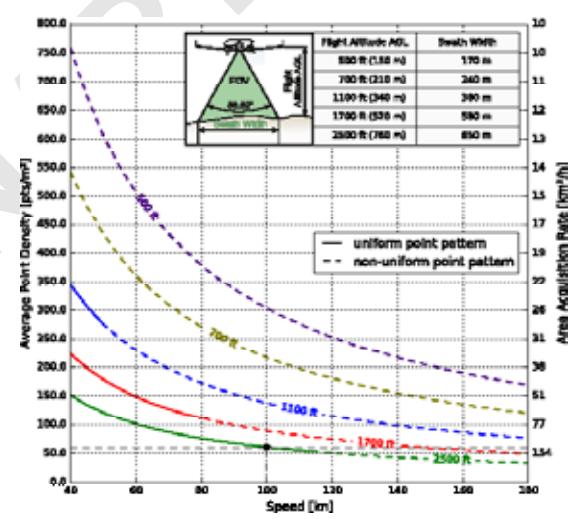

**Results:** Point Density ~ 61 pts/m<sup>2</sup>  
Area Acquisition Rate ~ 127 km<sup>2</sup>/h

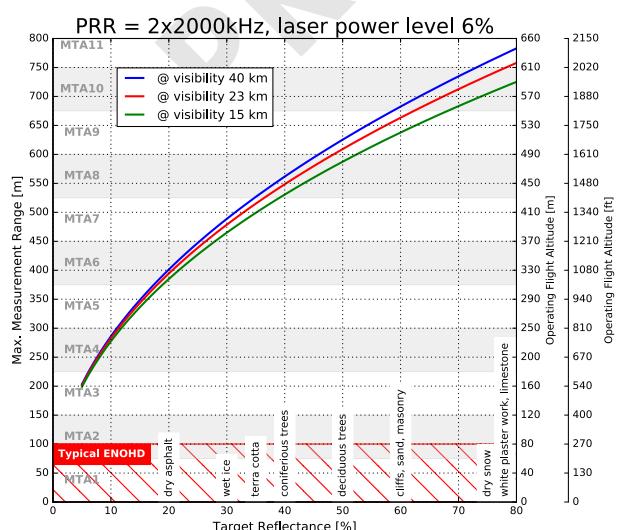

**Example:** VQ-1560 II at 2 x 2,000,000 pulses/sec, laser power level 6%  
Altitude 1,800 ft AGL, Speed 85 kn

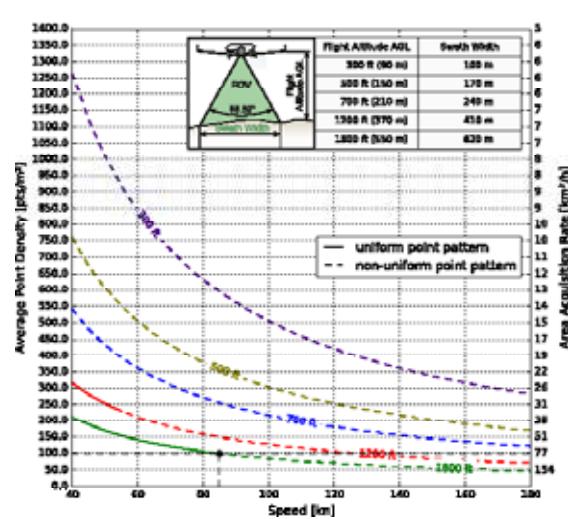

**Results:** Point Density ~ 99 pts/m<sup>2</sup>  
Area Acquisition Rate ~ 77 km<sup>2</sup>/h

**The following conditions are assumed for the Operating Flight Altitude AGL**

- ambiguity resolved by multiple-time-around (MTA) processing
- target size  $\geq$  laser footprint
- average ambient brightness
- effect FOV 58°
- roll angle  $\pm 5^\circ$

**Assumptions for calculation of the Area Acquisition Rate**


- 20% overlap of neighboring flight strips. This overlap covers a roll angle of  $\pm 5^\circ$  or a reduction of flight altitude AGL of 20%.

**Typical ENOHD**

- Calculated under assumption of an angular step width of 0.012° and an aircraft speed higher than 10kn.

# RIEGL VQ-1560 II Productivity

The RIEGL VQ-1560 II Dual Channel Airborne Mapping System offers highest productivity.

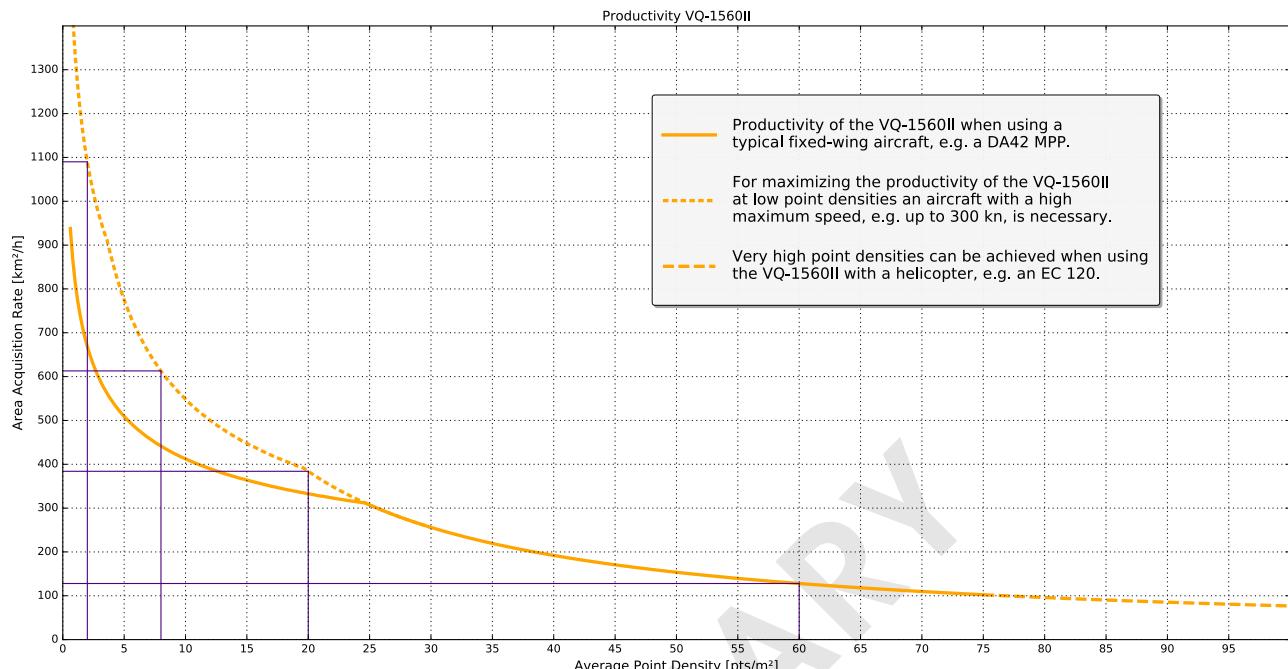

## Examples <sup>1)</sup>

Average Point Density	2 pts/ $\text{m}^2$	8 pts/ $\text{m}^2$	20 pts/ $\text{m}^2$	60 pts/ $\text{m}^2$
Flight Altitude	7200 ft	4040 ft	4000 ft	2450 ft
	2200 m	1230 m	1220 m	750 m
Ground Speed	300 kn	300 kn	190 kn	103 kn
Swath Width	2450 m	1380 m	1360 m	840 m
Productivity	1090 $\text{km}^2/\text{h}$	613 $\text{km}^2/\text{h}$	384 $\text{km}^2/\text{h}$	128 $\text{km}^2/\text{h}$
Measurement Rate <sup>2)</sup>	756 000 meas./sec	1.7 mill meas./sec	2.66 mill meas./sec	2.66 mill meas./sec
Camera GSD <sup>3) 4)</sup>	165 mm	93 mm	92 mm	56 mm
Camera Trigger Intervall <sup>4)</sup>	4.6 sec	2.6 sec	4.0 sec	4.5 sec

1) calculated for 20% target reflectivity and 20% stripe overlap

2) The target detection rate is equal to the measurement rate for terrains offering only one target per laser pulse but may be much higher for vegetated areas.

3) Ground Sampling Distance

4) Calculated for a 150 MPixel CMOS camera with a FOV of 56.2° x 43.7° and 60% image overlap in flight direction (endlap).

# Technical Data RIEGL VQ-1560 II

## Laser Product Classification

Class 3B Laser Product according to IEC60825-1:2014  
The following clause applies for instruments delivered into the United States: Complies with 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed.3., as described in Laser Notice No. 56, dated May 8, 2019.



The instrument must be used only in combination with the appropriate laser safety box.

## Range Measurement Performance

Laser Power Level	100%				
Laser Pulse Repetition Rate (PRR) <sup>1)</sup>	2 x 150 kHz	2 x 250 kHz	2 x 500 kHz	2 x 1000 kHz	2 x 2000 kHz
Max. Measuring Range <sup>2) 3) 4)</sup> natural targets p ≥ 20 %	4500 m	3700 m	2800 m	2050 m	1500 m
natural targets p ≥ 60 %	6800 m	5600 m	4300 m	3300 m	2450 m
Max. Operating Flight Altitude <sup>2) 5)</sup> (AGL) <sup>6)</sup> natural targets p ≥ 20 %	3700 m 12100 ft	3000 m 9900 ft	2300 m 7500 ft	1700 m 5500 ft	1200 m 4000 ft
natural targets p ≥ 60 %	5600 m 18300 ft	4600 m 15000 ft	3500 m 11500 ft	2700 m 8800 ft	2000 m 6500 ft
NOHD <sup>7) 9)</sup>	370 m	290 m	200 m	140 m	95 m
ENOHD <sup>8) 9)</sup>	2450 m	1900 m	1340 m	940 m	650 m
Number of Targets per Laser Pulse <sup>10)</sup>	14	14	14	9	4

Laser Power Level	50%	25%	12%	6%
Laser Pulse Repetition Rate (PRR) <sup>1)</sup>	2 x 2000 kHz	2 x 2000 kHz	2 x 2000 kHz	2 x 2000 kHz
Max. Measuring Range <sup>2) 3) 4)</sup> natural targets p ≥ 20 %	1100 m	780 m	560 m	400 m
natural targets p ≥ 60 %	1800 m	1300 m	940 m	680 m
Max. Operating Flight Altitude <sup>2) 5)</sup> (AGL) <sup>6)</sup> natural targets p ≥ 20 %	900 m 3000 ft	640 m 2100 ft	460 m 1500 ft	330 m 1080 ft
natural targets p ≥ 60 %	1450 m 4800 ft	1050 m 3400 ft	770 m 2500 ft	550 m 1800 ft
NOHD <sup>7) 9)</sup>	61 m	37 m	21 m	12 m
ENOHD <sup>8) 9)</sup>	430 m	270 m	145 m	82 m
Number of Targets per Laser Pulse <sup>10)</sup>	4	4	4	4

1) rounded average PRR

2) Typical values for average conditions and average ambient brightness; in bright sunlight the operational range may be considerably shorter and the operational flight altitude may be considerably lower than under an overcast sky.

3) The maximum range is specified for flat targets with size in excess of the laser beam diameter, perpendicular angle of incidence, and for atmospheric visibility of 40 km. Range ambiguities have to be resolved by multiple-time-around processing.

4) If the laser beam hits, in part, more than one target, the laser's pulse power is split accordingly. Thus, the achievable range is reduced.

5) Typical values for max. effective FOV 58°, additional roll angle ± 5°

6) Above Ground Level

7) Nominal Ocular Hazard Distance, based upon MPE according to IEC 60825-1:2014, for single line condition

8) Extended Nominal Ocular Hazard Distance, based upon MPE according to IEC 60825-1:2014, for single line condition

9) NOHD and ENOHD have been calculated for a typical angular step width of 0.012° (which means non-overlapping laser footprints), and an aircraft speed higher than 10 kn. NOHD and ENOHD increase when using overlapping laser footprints which may be intended e.g. for power line mapping.

10) when using online waveform processing

## Minimum Range<sup>11)</sup>

### Accuracy<sup>12) 13)</sup>/Precision<sup>13) 14)</sup>

### Laser Pulse Repetition Rate

### Effective Measurement Rate

### Echo Signal Intensity

### Laser Wavelength

### Laser Beam Divergence

100 m

20 mm / 20 mm

2 x 150kHz up to 2 x 2000kHz, selectable in steps of less than 1%

up to 2 x 1.33 MHz @ 60° scan angle

provided for each echo signal

near infrared

≤ 0.18 mrad @ 1/e<sup>15)</sup>, ≤ 0.25 mrad @ 1/e<sup>2</sup> 16)

## Scanner Performance

### Scanning Mechanism

### Scan Pattern

### Tilt Angle of Scan Lines

### Forward/ Backward Scan Angle

### in Non-Nadir Direction

### Scan Angle Range

### Total Scan Rate

### Angular Step Width Δθ

### Angle Measurement Resolution

rotating polygon mirror

parallel scan lines per channel, crossed scan lines between channels  
± 14° = 28°

± 8° at the edges

60° total per channel, resulting in an effective FOV of 58°

40<sup>17)</sup> - 600 lines/sec

0.006° ≤ Δθ ≤ 0.180° 18) 19)

0.001°

11) Limitation for range measurement capability, does not consider laser safety issues! The minimum range for valid reflectivity values is 250 m.

12) Accuracy is the degree of conformity of a measured quantity to its actual (true) value.

13) Standard deviation one sigma @ 250 m range under RIEGL test conditions.

14) Precision, also called reproducibility or repeatability, is the degree to which further measurements show the same result.

15) Measured at the 1/e points. 0.18 mrad correspond to an increase of 18 cm of beam diameter per 1000 m distance.

16) Measured at the 1/e<sup>2</sup> points. 0.25 mrad correspond to an increase of 25 cm of beam diameter per 1000 m distance.

17) The minimum scan rate depends on the selected laser PRR.

18) The minimum angular step width depends on the selected laser PRR.

19) The maximum angular step width is limited by the maximum scan rate.

Technical Data to be continued at page 10

# Technical Data RIEGL VQ-1560 II (continued)

## Data Interfaces

Configuration  
Monitoring Data Output  
Digitized Data Output  
Synchronization

TCP/IP Ethernet (10/100/1000 MBit/s)  
TCP/IP Ethernet (10/100/1000 MBit/s)  
Dual glass fiber data link to RIEGL Data Recorder DR1560(i)  
Serial RS232 interface, TTL input for 1 pps synchronization pulse,  
accepts different data formats for GNSS-time information

## General Technical Data

Power Supply / Current Consumption

Main Dimensions (flange diameter x height)  
Weight

Protection Class

Max. Flight Altitude operating / not operating  
Temperature Range operation / storage

20 - 32 V DC / typ. 250 W  
max. 550 W, depending on integrated optional components  
Ø 524 mm x 780 mm (without flange mounted carrying handles)  
approx. 55 kg without any camera but including a typical IMU/GNSS unit  
approx. 60 kg with optional components  
IP54  
18500 ft (5600 m) above MSL<sup>1)</sup> / 18500 ft (5600 m) above MSL  
-5°C up to +40°C / -10°C up to +50°C

1) Mean Sea Level

## Recommended IMU/GNSS System <sup>2) 3)</sup>

IMU Accuracy <sup>4)</sup>

Roll, Pitch  
Heading  
IMU Sampling Rate  
Position Accuracy (typ.)

0.0025°  
0.005°  
200 Hz  
0.05 m - 0.1 m

## Optional Components VQ-1560II

### Primary Camera

Sensor Resolution  
Sensor Dimensions (diagonal)  
Focal Length of Camera Lens  
Field of View (FOV)  
Interface  
Data Storage

RGB  
e.g. 150 MPixel CMOS  
66.7 mm (medium format)  
50 mm  
approx. 54.6° x 42.3°  
USB 3.0  
iX-Controller

### Secondary Camera

Different camera types including thermal or NIR cameras can be integrated,  
details on request.

- 2) The recommended IMU is listed neither in the European Export Control List (i.e. Annex 1 of Council Regulation 428/2009) nor in the Canadian Export Control List. Detailed information on certain cases will be provided on request.  
3) The RIEGL VQ-1560 II Laser Scanning system supports different IMU/GNSS Systems, details on request.

- 4) One sigma values, no GNSS outages, post-processed with base station data



**RIEGL**  
Laser Measurement Systems GmbH  
Riedenburgstraße 48  
3580 Horn, Austria  
Phone: +43 2982 4211  
office@riegl.co.at | www.riegl.com

RIEGL USA Inc. | info@rieglusa.com | www.rieglusa.com  
RIEGL Japan Ltd. | info@riegl-japan.co.jp | www.riegl-japan.co.jp  
RIEGL China Ltd. | info@riegl.cn | www.riegl.cn  
RIEGL Australia Pty Ltd. | info@riegl.com.au | www.riegl.com

[www.riegl.com](http://www.riegl.com)